

LUX ILLUMINAIRE




ELEGANTLY ATTAINABLE

LUX Illuminaire is solely focused on creating architectural lighting products that are as subtle as they are brilliant. Our products utilize state-of-the-art technologies, including name brand components, advanced optics, and integrated controls.



UNVEIL THE POTENTIAL

How often do you notice the lighting in a space? Usually, only when it's been done poorly. Whether the intent is to accentuate a space to set a cool, hip vibe or to provide a desired illumination and energy to users performing critical tasks, well designed lighting has the capability of enhancing people's experience. The most brilliant solutions can be subtle, understated and simple, yet provide the right color, ambiance, and brightness to any space.

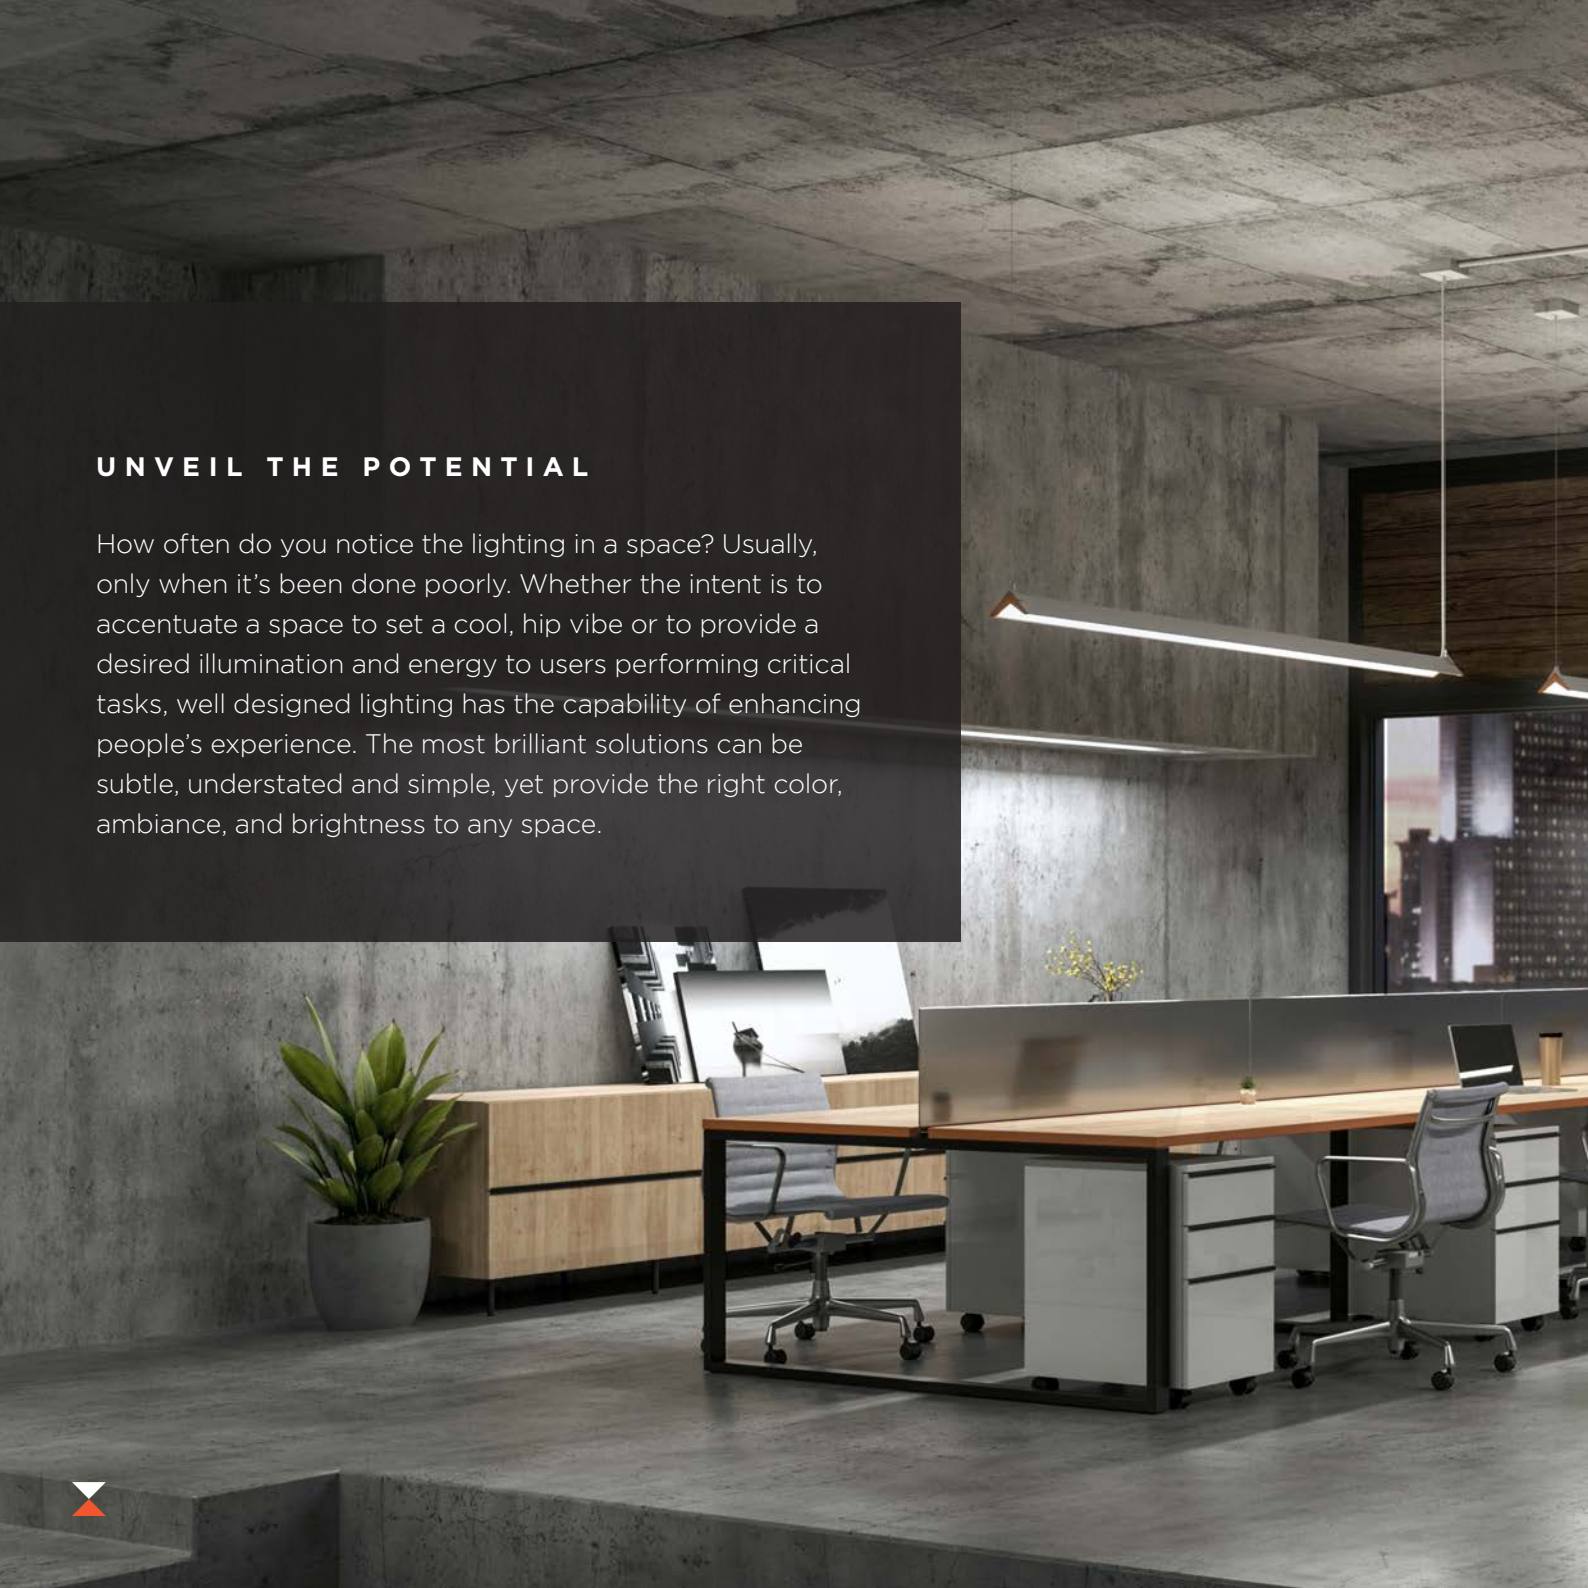



FEATURING AX.5 & EOS 2.0



FEATURING EOS 2.0 MINI

SIZE CORRELATION



STANDARD
HOUSEHOLD
LIGHT BULB

4.38 H
2.38 W



LUX

3.06 H
3.14 W



AX.5

4.05 H
5.56 W

HOUSING
2.75 H



TORR.5

4.05 H
5.56 W

HOUSING
2.75 H



ARX.4

4.5 H
4.5 W



LNXX
2.0

4.0 H
2.25 W



STANDARD
HOUSEHOLD
LIGHT BULB

4.38 H
2.38 W



EOS
2.0 MINI

2.25 H
2.25 W



EOS
1.0

4.0 H
1.68 W



EOS
2.0

4.0 H
2.25 W




EOS
3.0/WET

4.0 H
3.15 W



EOS
3.0 MINI

3.15 H
3.15 W



EOS
4.0

4.0 H
4.15 W



EOS
1.0a

8, 10, 12,
or 16 H
2.25 W

LUX SERIES



Form Redefined with the LUX Series

The beautiful LUX linear pendant offers form and function for specifiers who want performance and beauty in one luminaire. Enhance your space with this unique take on the traditional linear pendant style luminaire available with direct/indirect and direct only light distribution.



PRODUCT HIGHLIGHTS

Highly efficient with up to 128 lm/W

Standard lumen packages between 375 to 1000 lm/ft

1% 0-10v dimming standard

Fully extruded aluminum housing, up to 90% recycled material

L80 calculated at 80,000 hours

Available in 2 ft - 8 ft individual units or continuous row lengths

10-day QuickShip available on many options

LUX-Enabled with integrated wireless controls


90 degree fully lit corner option



LUX SERIES



STYLES



STANDARD FINISHES

Black, White & Silver

LIGHT DISTRIBUTION



PENDANT
DIRECT



PENDANT
DIRECT/
INDIRECT



WALL
DIRECT



WALL
DIRECT/
INDIRECT



FEATURING LUX



FEATURING LUX

T H E **^** X . 5



Lighting at its Finest

The AX.5 is a beautifully minimalistic luminaire that is the definition of finesse. Integrating anidolic light guide technology into opposing wedge profiles reduces glare, while creating a luminaire that appears smaller than its dimensions without the harshness typically associated with small apertures.

PRODUCT HIGHLIGHTS

Highly efficient with up to 126 lm/W

Standard lumen packages between 1600 to 4600 lm/4ft section

Unified Glare Rating (UGR) < 19

Available in 4 ft individual units or continuous row lengths

Optional powered suspension system on individual 4ft units

L80 calculated at 80,000 hours


1% 0-10v dimming standard






FEATURING AX.5

THE **^**X.5

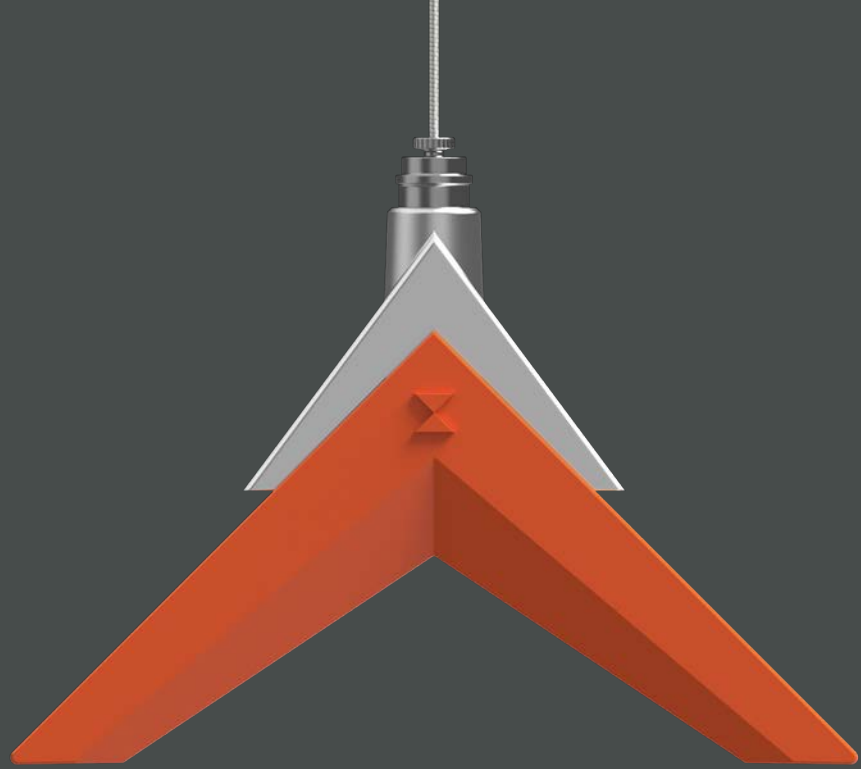


STYLES



STANDARD FINISHES
Black, White, Silver

END CAP COLORS



WHITE


SILVER



BLACK

LUX ORANGE

LIGHT DISTRIBUTION

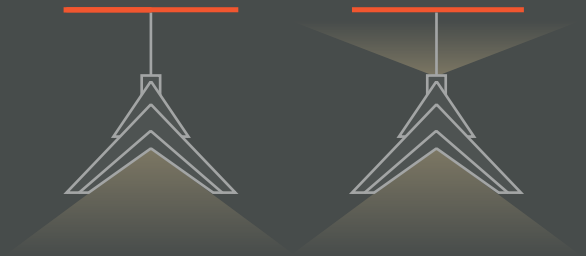

PENDANT
DIRECT

PENDANT
DIRECT/
INDIRECT




LIGHT DISTRIBUTION & PERFORMANCE



100% DOWN

	A	B	C	D
	3050	2450	2050	1600

LUMENS PER FT	DN	763	613	513	400
---------------	----	-----	-----	-----	-----



50% UP / 50% DOWN

	A	B	C	D
	4600	4150	3600	3050


LUMENS PER FT	UP	575	519	450	381
	DN	575	519	450	381



30% UP / 70% DOWN

	A	B	C	D
	4600	4150	3600	3050

LUMENS PER FT	UP	345	311	270	229
	DN	805	726	630	534



60% UP / 40% DOWN

	A	B	C	D
	4600	4150	3600	3050


LUMENS PER FT	UP	690	623	540	458
	DN	460	415	360	305



40% UP / 60% DOWN

	A	B	C	D
	4600	4150	3600	3050


LUMENS PER FT	UP	460	415	360	305
	DN	690	623	540	458



70% UP / 30% DOWN

	A	B	C	D
	4600	4150	3600	3050

LUMENS PER FT	UP	805	726	630	534
	DN	345	311	270	229

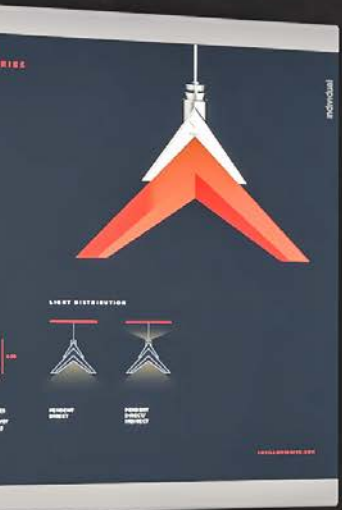


FEATURING AX.5



MENU ILLUSTRATION
High detailed ch...

FEATURING AX.5

T H E A X . 5 S P O K E

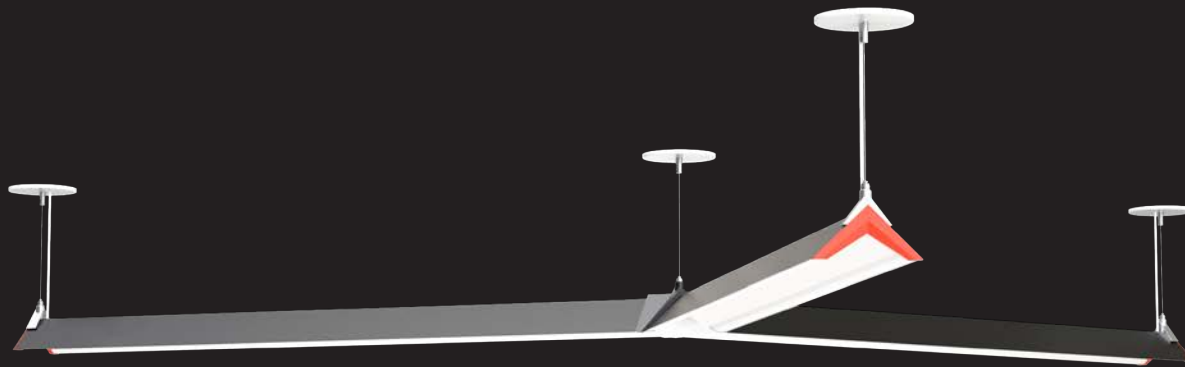

Refinement and Style unite.


Introducing the ultimate integration for the AX.5, the Spoke Center Hub. The Hub seamlessly connects three intelligently designed AX.5 luminaire's to create one magnificently polished display. Once again, LUX Illuminaire has delivered a unique design that marries dramatic aesthetics with remarkable innovation.



STANDARD FINISHES

Black, White, Silver

SPOKE CENTER HUB DIMENSIONS

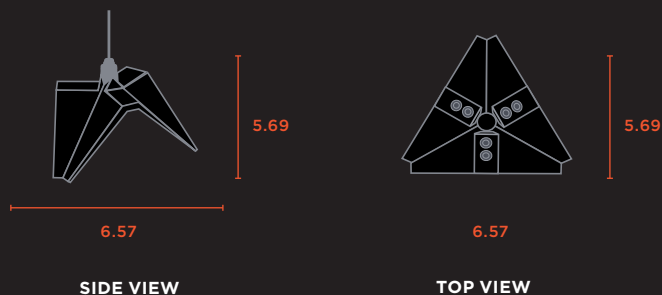



FEATURING AX.5 SPOKE

THE TORR.5



Advanced Lighting Design

The TORR.5 is a sleek and modern luminaire that utilizes the same integrated anidolic light guide technology into opposing wedge profiles as the AX.5. The TORR.5 reduces glare while it creates a luminaire that appears smaller than its dimensions, all without the harshness that's typically associated with small apertures.

PRODUCT HIGHLIGHTS

Highly efficient with up to 126 lm/W

Standard lumen packages between 1600 to 4600 lm/4ft section

Unified Glare Rating (UGR) < 19

Available in 4 ft individual units or continuous row lengths

Optional powered suspension system on individual 4ft units

L80 calculated at 80,000 hours

1% 0-10v dimming standard







The project will
- The required support
- The impact
- The clear approach
- The clear method of
- The clear
- We will be providing
- In addition
- The project
- The

FEATURING TORR.5

THE TORR.5

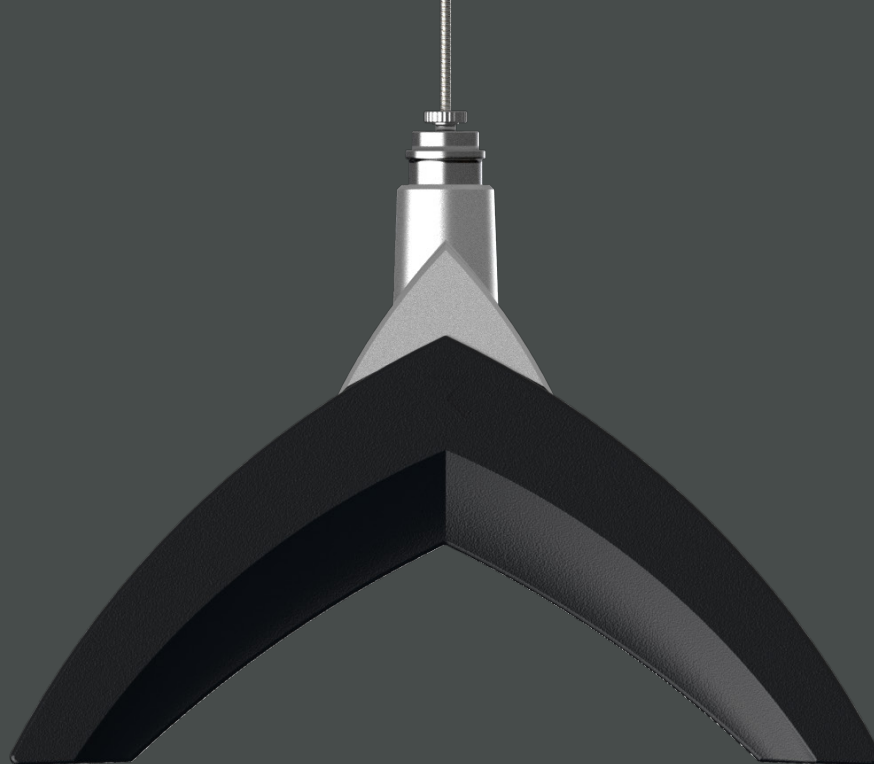

STYLES



STANDARD FINISHES

Black, White, Silver

END CAP COLORS



WHITE

SILVER



BLACK

LUX ORANGE

LIGHT DISTRIBUTION



PENDANT
DIRECT

PENDANT
DIRECT/
INDIRECT



THE TORR.5


LIGHT DISTRIBUTION & PERFORMANCE



100% DOWN

	A	B	C	D
	3050	2450	2050	1600

LUMENS PER FT	DN	763	613	513	400
---------------	----	-----	-----	-----	-----



50% UP / 50% DOWN

	A	B	C	D
	4600	4150	3600	3050


LUMENS PER FT	UP	575	519	450	381
DN	575	519	450	381	



30% UP / 70% DOWN

	A	B	C	D
	4600	4150	3600	3050

LUMENS PER FT	UP	345	311	270	229
DN	805	726	630	534	



60% UP / 40% DOWN

	A	B	C	D
	4600	4150	3600	3050


LUMENS PER FT	UP	690	623	540	458
DN	460	415	360	305	



40% UP / 60% DOWN

	A	B	C	D
	4600	4150	3600	3050

LUMENS PER FT	UP	460	415	360	305
DN	690	623	540	458	



70% UP / 30% DOWN

	A	B	C	D
	4600	4150	3600	3050

LUMENS PER FT	UP	805	726	630	534
DN	345	311	270	229	



FEATURING TORR.5



FEATURING TORR.5

THE TORR.5 SPOKE



Refinement and Style unite.


Introducing the ultimate integration for the TORR.5, the Spoke Center Hub. The Hub allows three impressive luminaires to be flawlessly aligned into one dramatic fixture. Advance your space with style and innovation.



STANDARD FINISHES


Black, White, Silver

SPOKE CENTER HUB DIMENSIONS

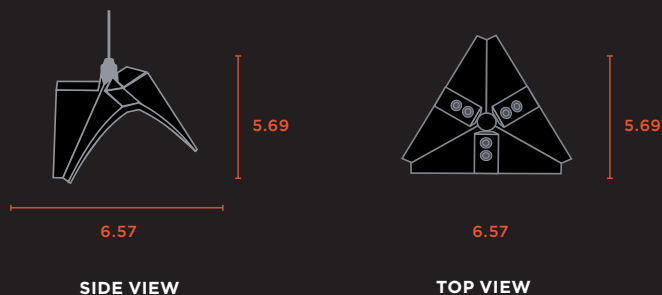



ARX.4 SERIES

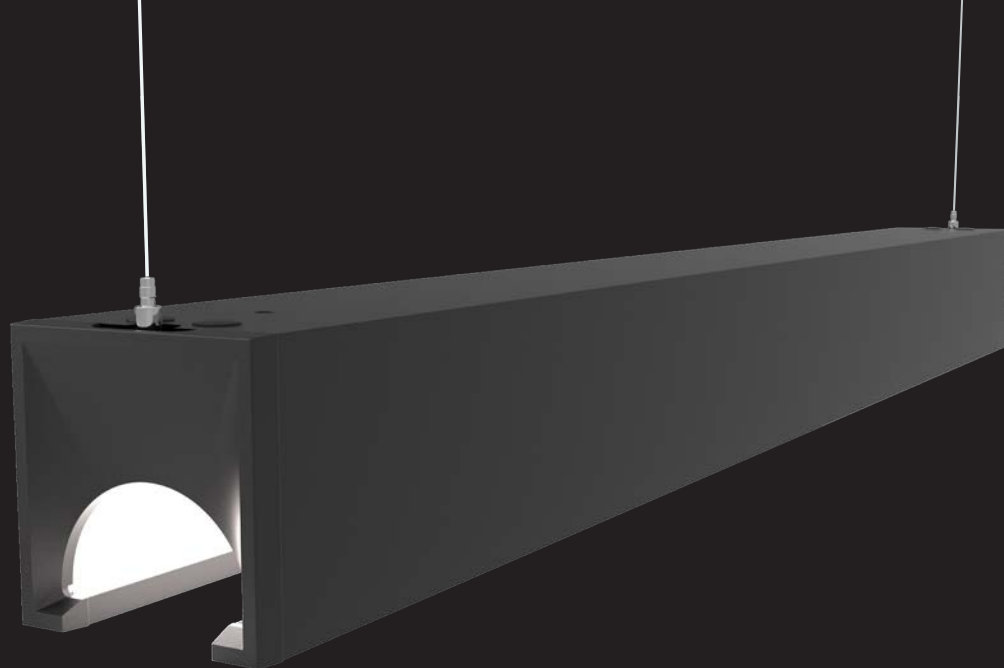

Uniform Illumination

The sophisticated ARX.4 linear series minimizes glare by utilizing precisely placed LED's to indirectly illuminate its internal arc cavity. ARX.4 provides superior performance and efficacy that has an uninterrupted line of light that visually appears to be endless.

PRODUCT HIGHLIGHTS

Highly efficient with up to 133 lm/W

Up to 200 ft of uninterrupted light

Standard lumen packages between 375 to 1250 lm/ft

Available in 2 ft - 8 ft individual units or continuous row lengths


1% 0-10v dimming standard

LUX-Enabled with integrated wireless controls




ARX.4 SERIES

STYLES




STANDARD FINISHES

Black, White & Silver

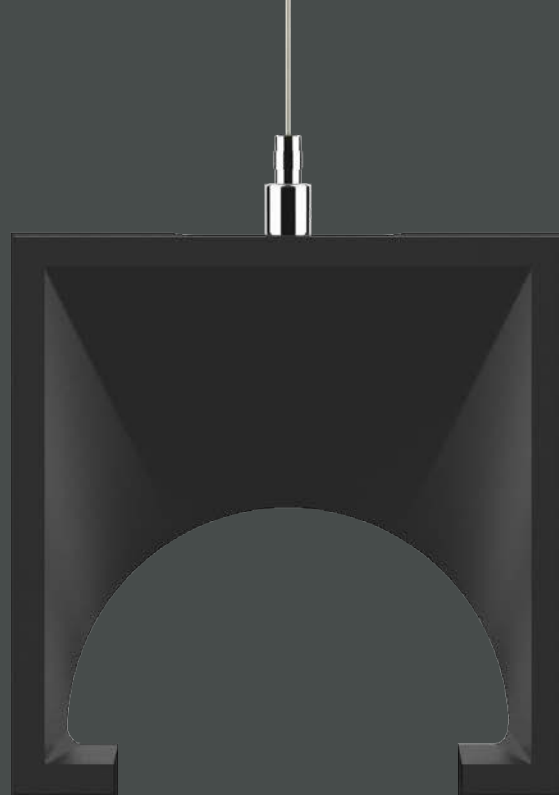

LIGHT DISTRIBUTION



PENDANT
DIRECT



PENDANT
DIRECT/
INDIRECT



RECESSED



SURFACE



WALL
DIRECT




WALL
DIRECT/
INDIRECT



FEATURING ARX.4 RECESSED



LNXX 2.0 SERIES

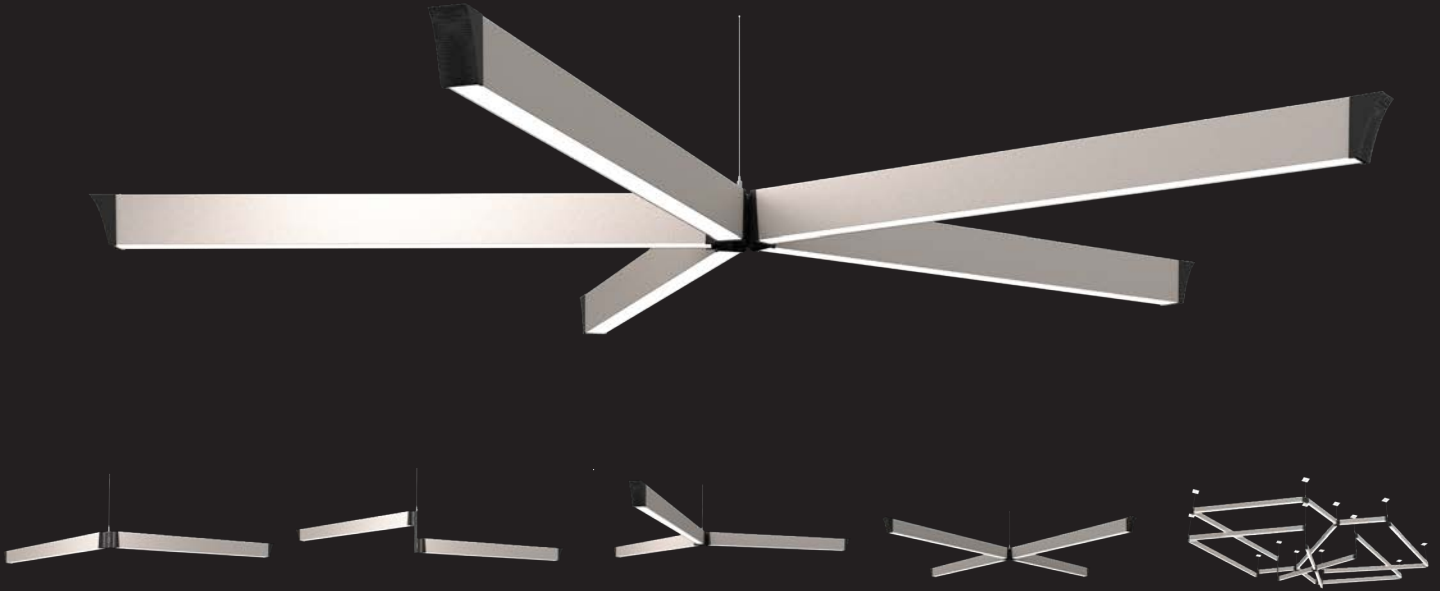

Most Versatile Luminaire the LNXX 2.0

The LNXX 2.0 features a sleek profile with a 2-inch aperture. Designed for beauty and built for optimum adaptability the LNXX 2.0 has a simple but brilliant design that allows multiple luminaires to be linked together providing endless configuration possibilities and easy in-field adjustments.



PRODUCT HIGHLIGHTS

Highly efficient with up to 112 lm/W

Standard lumen packages between 375 to 1000 lm/ft

1% 0-10v dimming standard

Fully extruded aluminum housing, up to 90% recycled material

L80 calculated at 80,000 hours

Available in 2 ft - 8 ft individual units or continuous row lengths


Tunable White

LUX-Enabled with integrated wireless controls



LNXX 2.0 SERIES


STYLES



STANDARD FINISHES


Black, White & Silver

LIGHT DISTRIBUTION



PENDANT
DIRECT

PENDANT
DIRECT/
INDIRECT

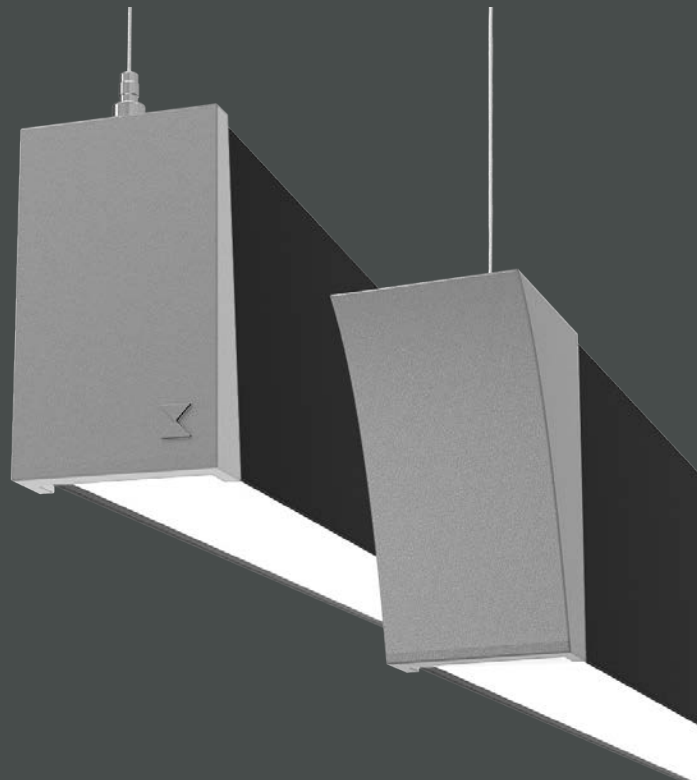

PIVOT CONNECTORS



2 PIVOT



3 PIVOT



4 PIVOT



5 PIVOT



ELEVATOR



ADJUSTABLE
END CAP



FEATURING LNX 2.0



FEATURING THE LNXX 2.0



FEATURING CENTRO HUB

CENTRO HUB 2.0





Expand the Possibilities of any EOS 2.0 & LNXX 2.0 Luminaire Series with the CENTRO Hub 2.0

The CENTRO Hub 2.0 is a fixed connector system that is compatible with the EOS 2.0 Pendant Direct, EOS 2.0. Pendant Direct/Indirect and LNXX 2.0 series of luminaires. The CENTRO Hub 2.0's brilliant design allows multiple luminaires to be linked together utilizing seven fixed non-illuminated connector options, allowing seamless power pass through while providing endless configuration possibilities.




STANDARD FINISHES
Black, White & Silver


FIXED CONNECTORS

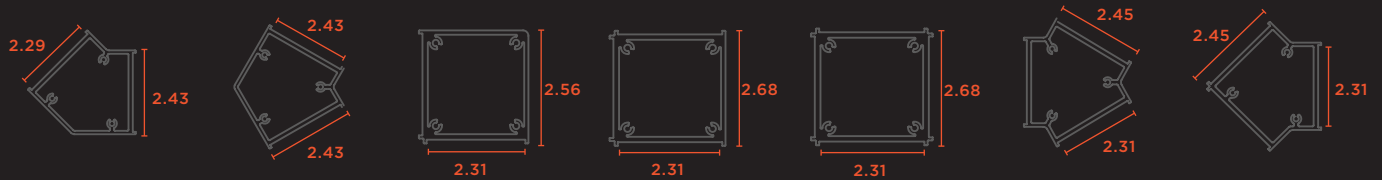


45L



60L




90L




90T



90X



120Y



135Y

LUX-ENABLED PARTNERS



OSRAM



enlighted

Specification Freedom

Technological advancements have made it far easier for building managers to create an energy efficient system through the use of lighting controls.

LUX Illuminaire utilizes the latest controls and sensors, allowing you the freedom to specify the right product with the right features for your next project.

CONTROL OPTIONS

Lutron Vive—RF/with Daylight/Occupancy (VDO)

Lutron Vive RF Fixture Control (VRF)

OSRAM Sensilum (SPD)

OSRAM Connected Lighting Module (CLM)

Wattstopper Daylight Sensor (FD-301)

Wattstopper Occupancy Sensor (FS0-205v2)

Enlighted Daylight Harvesting/Occupancy (SU-5E-01)




LUX | ENABLED



LUTRON VIVE

Technological advancements have made it far easier for building managers to create an energy efficient system through the use of lighting controls.

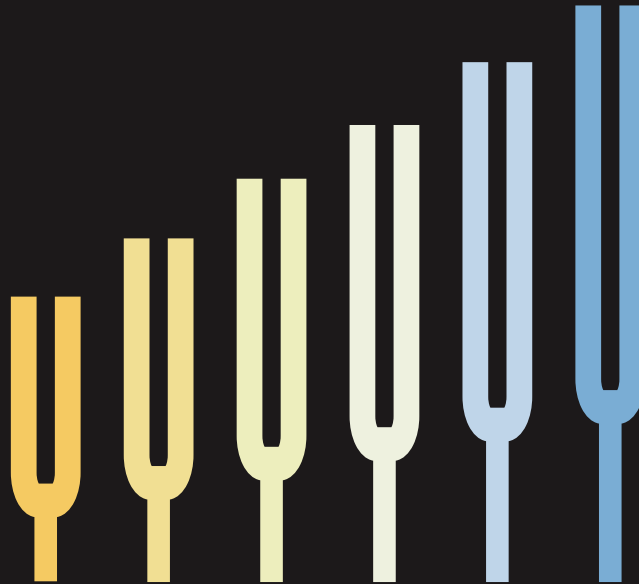

TUNABLE WHITE SOLUTIONS

Powered by LUX | ENABLED Technology

FEATURED TECHNOLOGY

Standard 0-10v - 2 Channel Control (Optional Dim to Warm and Optional Blue Tooth Enabled)

Lutron T-Series 2-Channel Driver pairs with Lutron's Quantum System

OSRAM Tunable White Standalone Solution with OSRAM Wall Station

OSRAM 2-Channel Tunable White LED Driver, Dexal Driver with Optional DALI mode (58287)





2700K


3000K

3500K


4000K

5000K

6500K

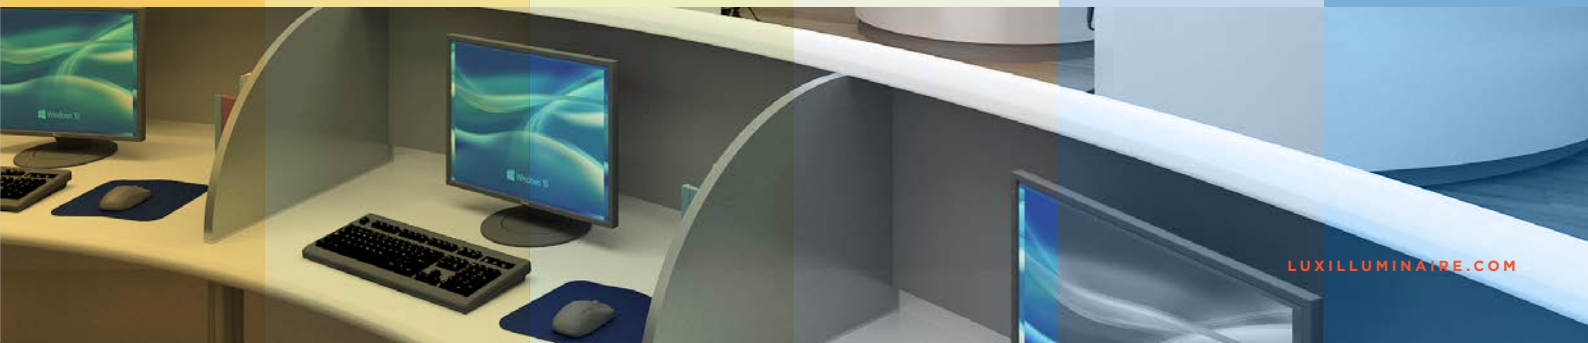

EOS SERIES

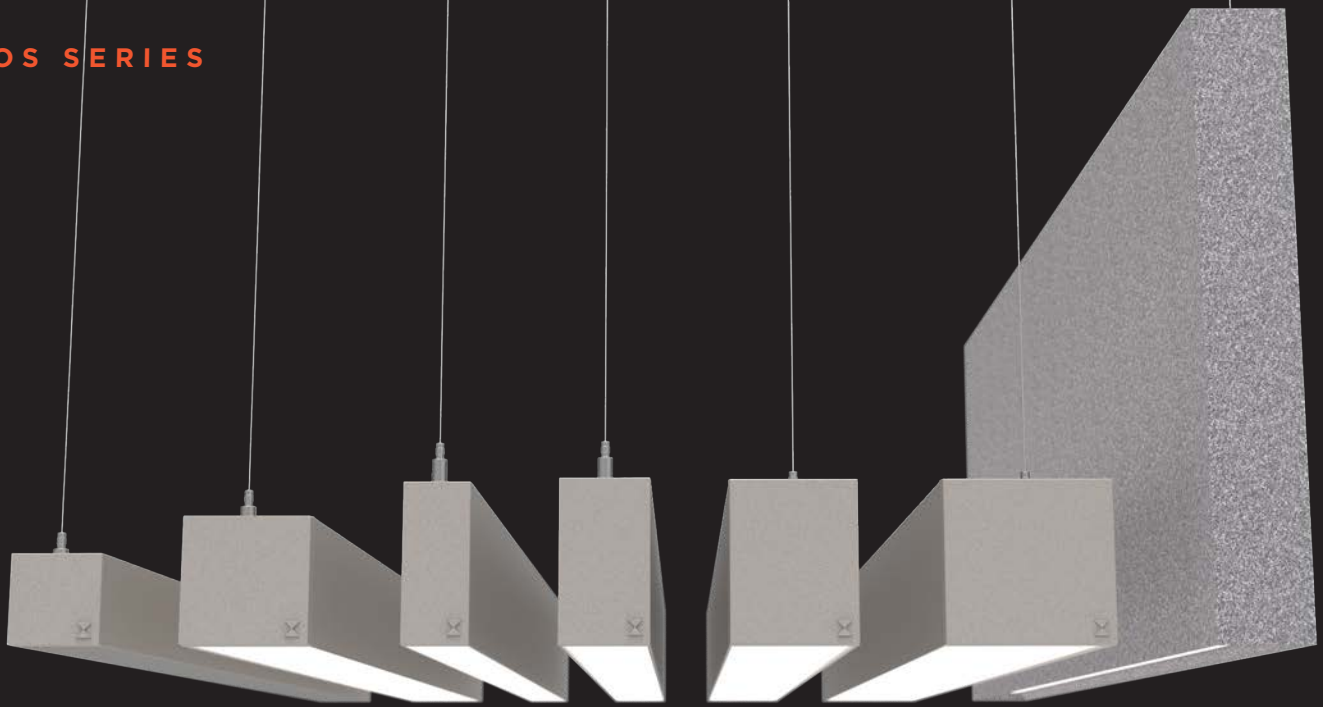

Modern Profile with Clean Lines

When your product calls for sophisticated, modern lighting, the EOS series of fixtures is the perfect option to provide an elegant look to any environment.

Designed for beauty and built for performance, the EOS series of luminaires can be customized to fit your lighting needs with optional color temperature, drivers, sensors, and more.

PRODUCT HIGHLIGHTS

Highly efficient with up to 126 lm/W

Standard lumen packages between 375 to 1250 lm/ft

1% 0-10v dimming standard

Fully extruded aluminum housing, up to 90% recycled material

L80 calculated at 80,000 hours

Available in 1, 2, 3, or 4 inch apertures

Available in 2 ft - 8 ft individual units or continuous row lengths

10-day QuickShip available on many options

LUX-Enabled with integrated wireless controls







FEATURING EOS 2.0

EOS SERIES

STYLES

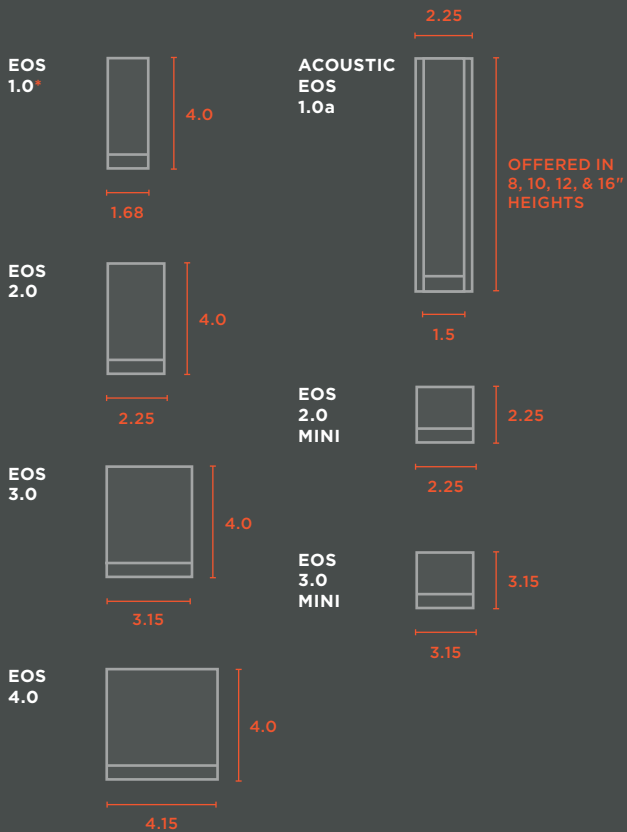

LIGHT DISTRIBUTION

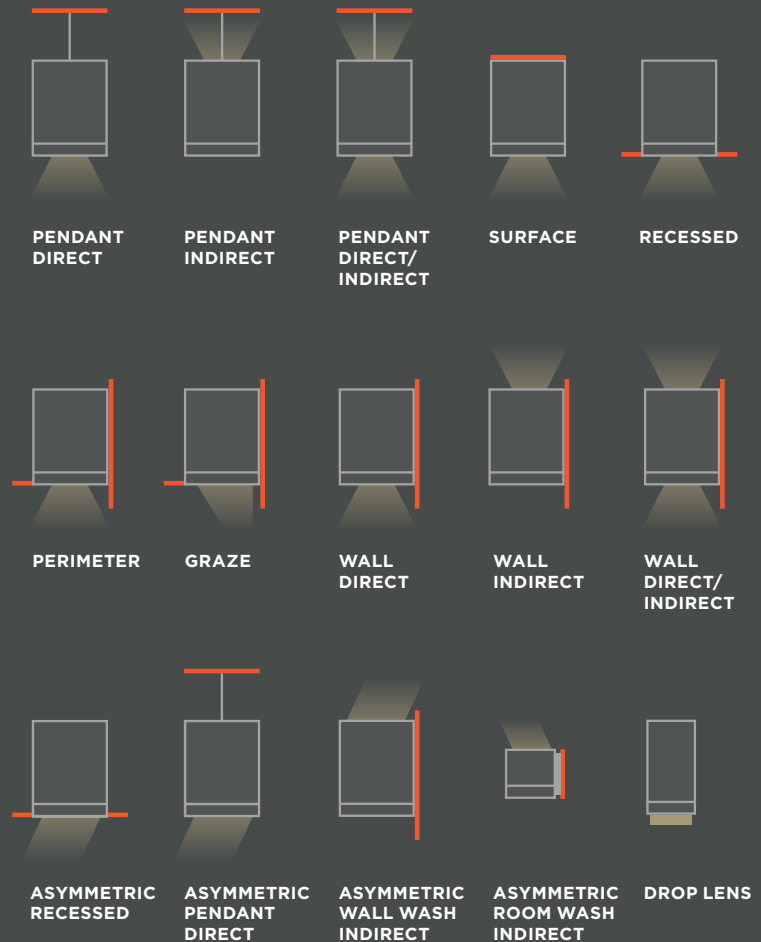

STANDARD FINISHES

Black, White & Silver



EOSa 1.0 STANDARD COLORS

Black, Marble, Charcoal & Graphite

CORNERS

Vertical & Horizontal



EOS SERIES

OPTIC DISTRIBUTION



FAMILY	DISTRIBUTION	LAM DIRECT	ASY DIRECT	BAT DIRECT	GRZ DIRECT	LAM INDIRECT	ASY INDIRECT	BAT INDIRECT	XBT INDIRECT
EOS 2.0/ 3.0/ 4.0	PENDANT DIRECT	x	x	x	x				
EOS 2.0/ 3.0	PENDANT INDIRECT					x	x	x	
EOS 2.0/ 3.0/ 4.0	PENDANT DIRECT/INDIRECT	x	x	x	x	x	x	x	x
EOS 2.0/ 3.0/ 4.0	SURFACE	x	x	x	x				
EOS 2.0/ 3.0/ 4.0	RECESSED	x	x	x	x				
EOS 2.0/ 3.0	PERIMETER	x	x		x				
EOS 2.0/ 3.0/ 4.0	WALL DIRECT	x	x		x				
EOS 2.0/ 3.0/ 4.0	WALL INDIRECT					x	x		
EOS 2.0/ 3.0/ 4.0	WALL DIRECT/INDIRECT	x	x		x	x	x		
EOS 2.0 MINI	MULLION MOUNT INDIRECT					x	x		
EOS 2.0 MINI	PENDANT INDIRECT					x	x		x
EOS 3.0 MINI	PENDANT DIRECT/INDIRECT	x	x	x		x	x		x
EOS 3.0 WET	RECESSED	x	x	x	x				
EOS 3.0 WET	PENDANT DIRECT	x	x	x	x	x			
EOS 3.0 WET	SURFACE	x	x	x	x				
EOS 3.0 WET	WALL DIRECT	x	x		x				
EOS 1.0	PENDANT DIRECT	x							
EOS 1.0	PENDANT DIRECT/INDIRECT	x				x			
EOS 1.0	RECESSED	x							
EOS 1.0A	PENDANT	x							

ORANGE X INDICATES OPTIC COMING SOON



FEATURING EOSa 1.0 ACOUSTIC



ACOUSTIC EOS 1.0a

Optimal Sound and Light Quality

The EOS 1.0a minimizes high-noise levels and reverb issues that are common with multi-purpose open environments.

Available in lit or unlit baffles, EOS 1.0a comes in an array of standard and custom colors. With a modern, architectural look, this luminaire will work with the aesthetic of a space, integrating the finest in illumination and sound absorption.

EOS 1.0a STANDARD COLORS



BLACK
111



MARBLE
104



CHARCOAL
133



DARK CHARCOAL
134

EOS 1.0a CUSTOM COLORS



YELLOW
409



SPRING
619



GREEN
620



BLUE
821



NAVY
825



RED
512



PLUM
214



CREAM
101



TAUPE
706



WHITE
105

STEEL SERIES



Low Profile, Performance Driven

When you need a workhorse that looks great and doesn't break your bank, LUX Illuminaire has you covered with the Steel Pendant Series.

Available in lensed, flush baffle, and drop baffle, with two companion Wall Mount luminaires, the Steel Series is the perfect choice for all your budget conscious projects.

PRODUCT HIGHLIGHTS

Excellent performance up to 140 lm/W with 4 profile options

One-piece 20 gauge steel housing

Available in 4 ft & 8 ft individual units or continuous row lengths

L80 calculated at 80,000 hours

UL/CUL approval

Aircraft grade cable with fully adjustable yoke mount

10-day QuickShip on many options

LUX-Enabled with integrated wireless controls

5 year limited warranty



STEEL SERIES

STYLES



LIGHT DISTRIBUTION



PENDANT
80% UP
20% DOWN



PENDANT
60% UP
40% DOWN



PENDANT
50% UP
50% DOWN



PENDANT
30% UP
70% DOWN



PENDANT
20% UP
80% DOWN



PENDANT
0% UP
100% DOWN



WALL
30% UP
70% DOWN



STANDARD FINISHES

Black, White & Silver

	ERA	SOL
PENDANT 80%UP 20%DOWN	x	x
PENDANT 60%UP 40%DOWN	x	x
PENDANT 50%UP 50%DOWN	x	x
PENDANT 30%UP 70%DOWN	x	x
PENDANT 20%UP 80%DOWN	x	x
PENDANT 0%UP 100%DOWN	x	
WALL 30%UP 70%DOWN	x	



FEATURING ARX.4



ABOUT LUX ILLUMINAIRE

LUX Illuminaire is solely focused on creating architectural lighting products that are as subtle as they are brilliant in suspended, recessed, and wall-mounted applications. Our luminaires utilize state-of-the-art technologies, including name brand components, advanced optics, and integrated controls, providing the most energy efficient products on the market today. Our in-house team of industrial designers and lighting engineers understand the complex science of lighting and artfully curate solutions that are modern, clean, and human-centric.

Our high-quality luminaires are manufactured in the United States and work in a variety of environments, allowing you to have a solution that provides confidence and consistency for all your architectural lighting needs. All with an attainable approach to clean and modern design.

2020

LUX ILLUMINAIRE



P. 260.599.3590

orders@luxilluminaire.com

luxilluminaire.com