




STANDARD FINISHES
Black, White, & Silver

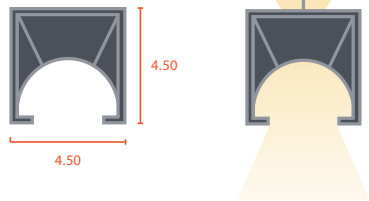

UP TO 133 lm/W PERFORMANCE				
DIRECT LIGHT	INDIRECT LIGHT			
	375 lm/ft	500 lm/ft	750 lm/ft	1000 lm/ft
375 lm/ft	23.3	26.9	33.6	41.4
500 lm/ft	27.4	31.0	37.7	45.5
750 lm/ft	35.6	39.2	45.9	53.7
1000 lm/ft	43.9	47.5	54.2	62.0
1250 lm/ft	52.1	55.7	62.4	70.2

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C

LIGHT LOSS FACTOR		
CCT	CRI	%
4000K	84+	100%
3500K	84+	97.1%
3000K	84+	95.7%
2700K	84+	94.1%
4000K	92+	88.9%
3500K	92+	85.5%
3000K	92+	83.8%
2700K	92+	82.4%

ORDER GUIDE

ARX.4-P-DI																		M, N, O (Multiple Selections)
-------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-------------------------------

EXAMPLE: ARX.4-P-DI 1000 500 6 40K 8 1 UNV S1 W 9C 24



A. MODEL	B. DIRECT DISTRIBUTION	C. INDIRECT DISTRIBUTION	D. LENGTH		E. COLOR TEMPERATURE		F. CRI			
ARX.4-P-DI	375	375 lm/ft	375	375 lm/ft	2	2 ft (24 in)	27K	2700K	8	80+ CRI
	500	500 lm/ft	500	500 lm/ft	3	3 ft (36 in)	30K	3000K		
	750	750 lm/ft	750	750 lm/ft	4	4 ft (48 in)	35K	3500K		
	1000	1000 lm/ft	1000	1000 lm/ft	5	5 ft (60 in)	40K	4000K		
	1250	1250 lm/ft	XXX	1000	Custom lm/ft	6	6 ft (72 in)	WCT	White Color Tuning	
	XXX	Custom lm/ft				7	7 ft (84 in)		2700K - 6500K	
					8	8 ft (96 in)			9	90+ CRI
					XXX	System Run				

NOTES
 Consult factory for outputs between min and max.
 Consult factory for outputs between min and max.
 WCT - max lm/ft is 1000 based on 80 CRI and 4000K.
 90 CRI option has an R9 value greater than 60.

G. CIRCUIT	H. VOLTAGE	I. DRIVER			J. FINISH		K. MOUNTING		
1 1-Circuit 2 2-Circuit	UNV 120-277v 347 347v	S1 LDE1	1% Dimming (0-10v) Lutron Hi-Lume 1%	DXL2 DALI	Dexal 2-Chanel DALI 2.0 Compatible	W White B Black S Silver CC Custom Colors	9C 9/16 in Tee Clip 15C 15/16 in Tee Clip SC Screw Slot Tee Clip HC Hard Ceiling		
		LDE5 ELO DXL	Fade to Black Lutron 5 Series 0.1% EldoLED 1% Dexal	PSQ LTE	Lutron T Series Lutron Hi-Lume 2-Wire LED driver				

347 may not be available in all configurations.
 VDO, VRF, SPD, & CLM options supplied with DXL driver standard.
 Consult factory for custom colors. Power feeds and canopies are standard white. For black or silver please select color under Factory Options.

OPTIONS

L. SUSPENSION LENGTH	M. CONTROLS		N. FACTORY OPTIONS			
24 24 in 42 42 in 102 102 in 150 150 in	NONE VDO	Leave Blank Lutron Vive (RF/Daylight/Occ)	DAY Wattstopper Daylight Sensor (FD-301)	OCC Wattstopper Occ Sensor (FS-205v2)	NONE EB	Leave Blank Emergency Battery (10-Watt)
	VRF	Lutron Vive RF Fixture Control	DOC Enlightened Daylight/ Harvesting Occ (SU-5E-01)		EC NL	Emergency Circuit Night Light Circuit
	SPD	Osram SensiLUM Daylight/Harvest/Occ			BAT BF BC SF	Batwing Distribution Black Power Feed Black Canopy Silver Power Feed
	CLM	Osram Connecting Light Module (CLM)			SC FO FC	Silver Canopy Feed Flat Open End Plate Flat Closed End Plate

Each individual suspension length is adjustable.
 VDO, VRF, SPD, & CLM options supplied with DXL driver standard.
 EB option only available for lengths greater than 4ft.
 Sculpted end cap is standard.
 Power feeds and canopies are standard white. For black or silver please indicate using above options code.
 May choose more than one option in this category.

LIGHT SOURCE

Long life name brand LED chips and boards to ensure the highest of quality while providing even and smooth illumination throughout our luminaires.

Our luminaires are available in 2700K, 3000K, 3500K and 4000K color temperature as well as White Color Tuning (2700-6500K).

Optional 80CRI or 90CRI available in all CCT options.

LUMEN MAINTENANCE

The projected lumen maintenance of the name brand mid-powered LED's are projected to maintain 80% (L80) of their initial output for +80,000 hours.

CONSTRUCTION

The housings are constructed of (6063T5) extruded aluminum. Our internal joiner system is designed to the highest of standards to ensure our precision cut housings align and fit tightly without light leak. Our precision fitting end caps are constructed out of die cast aluminum and our steel reflectors are painted white.

FINISH

Polyester powder, low gloss textured paint finish applied after a multi-stage pretreatment. Standard luminaire finishes include white, silver, and black. Custom color options are available. (Consult Factory).

OPTICS

Snap-in Extruded frosted Acrylic Lens.

DRIVERS

All of our luminaires come standard with 1% dimming and THD <20% utilizing 0-10v constant current protocol. 120v/277v is standard with the option of 347v.

EMERGENCY

An integral factory installed 10 watt emergency battery pack. Emergency circuit and Night Light circuit options are available.

LUMINAIRE LENGTH

Our ARX.4 Pendant Direct/Indirect luminaire series are available in 2', 3', 4', 5', 6', 7' and 8' individual lengths or continuous row configurations. Continuous row configurations are joined together on-site utilizing the joiner kits provided.



CONTINUOUS RUN ORDER GUIDES

Please use the following run guides for fixture ordering. If your product will require a submittal, our in-house Application Engineering Team will work closely with you on your project.

ALUMINUM PRODUCT ORDER GUIDE	
RUN LENGTH (ft)	RUN CONFIGURATION - SECTION LENGTHS
9	6' + 3'
10	6' + 4'
11	6' + 5'
12	6' + 6'
13	6' + 7'
14	8' + 6'
15	8' + 7'
16	8' + 8'
17	6' + 5' + 6'
18	6' + 6' + 6'
19	6' + 7' + 6'
20	8' + 4' + 8'
21	8' + 5' + 8'
22	8' + 6' + 8'
23	8' + 7' + 8'
24	8' + 8' + 8'
25	5' + 8' + 8' + 4'
26	4' + 6' + 6' + 6' + 4'
27	6' + 8' + 8' + 5'
28	6' + 8' + 8' + 6'
29	7' + 8' + 8' + 6'

*Standard Run Configurations Shown, Consult Factory for Custom Configurations.

ALUMINUM PRODUCT ORDER GUIDE	
RUN LENGTH (ft)	RUN CONFIGURATION - SECTION LENGTHS
30	6' + 6' + 6' + 6' + 6'
31	6' + 6' + 7' + 6' + 6'
32	8' + 8' + 8' + 8'
33	5' + 8' + 8' + 8' + 4'
34	6' + 8' + 8' + 8' + 4'
35	6' + 8' + 8' + 8' + 5'
36	6' + 8' + 8' + 8' + 6'
37	8' + 8' + 5' + 8' + 8'
38	8' + 8' + 6' + 8' + 8'
39	8' + 8' + 7' + 8' + 8'
40	8' + 8' + 8' + 8' + 8'
41	5' + 8' + 8' + 8' + 8' + 4'
42	6' + 8' + 8' + 8' + 8' + 4'
43	6' + 8' + 8' + 8' + 8' + 5'
44	6' + 8' + 8' + 8' + 8' + 6'
45	7' + 8' + 8' + 8' + 8' + 6'
46	3' + 8' + 8' + 8' + 8' + 8' + 3'
47	4' + 8' + 8' + 8' + 8' + 8' + 3'
48	8' + 8' + 8' + 8' + 8' + 8'
49	5' + 8' + 8' + 8' + 8' + 8' + 4'
50	6' + 8' + 8' + 8' + 8' + 8' + 4'

*Standard Run Configurations Shown, Consult Factory for Custom Configurations.

